

# Small & medium capacity air pump XP-40 / 60 / 80



Pressure type

Dust control "Dust trap filter"

Easy restart by micro switch (XP-60 / 80 only)


No need of grounding

Outdoor (Rainproof) use

## Applications

- Septic tank (biological contact aeration)
- Air injection for bubble bath
- Small capacity compressor

## Dimensions



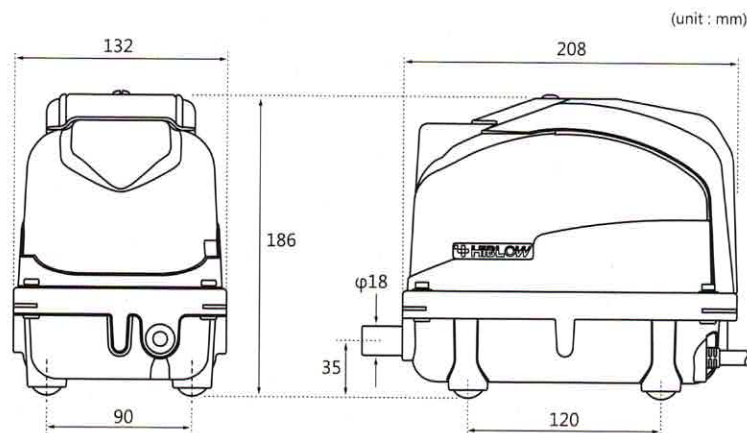


## Specifications

|                             | XP-40             |    | XP-60 |    | XP-80 |    |
|-----------------------------|-------------------|----|-------|----|-------|----|
| Rated voltage<br>[ V ]      | AC100 / 120 / 230 |    |       |    |       |    |
| Power frequency<br>[ Hz ]   | 50                | 60 | 50    | 60 | 50    | 60 |
| Rated pressure<br>[ kPa ]   | 12.8              |    | 14.7  |    |       |    |
| Airflow volume<br>[ L/min ] | 40                |    | 60    |    | 80    |    |
| Power consumption<br>[ W ]  | 30                |    | 39    |    | 58    |    |
| Sound level<br>[ dBA ]      | 33                |    | 35    |    | 36    |    |
| Weight<br>[ kg ]            | 4.1               |    | 4.3   |    |       |    |

## Performance Curve

— 50Hz — 60Hz — Rated pressure — Pressure range for use

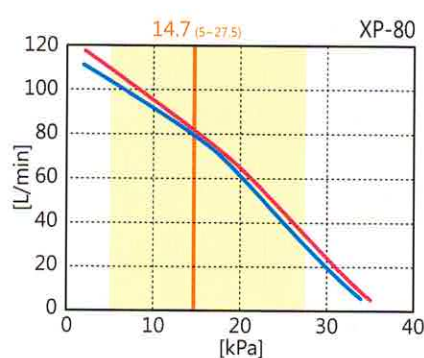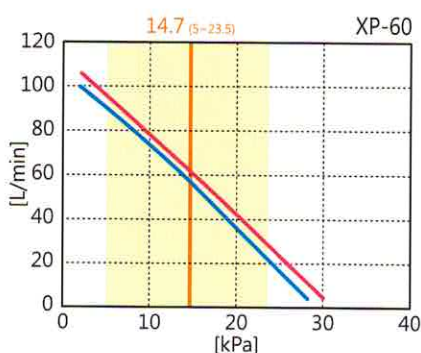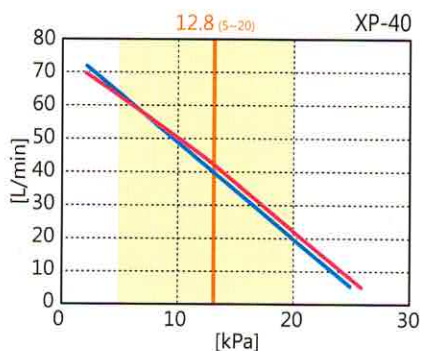

\* All characteristics values are only for reference, and are not guaranteed values.  
\* Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).