

DUO-60/80



Pressure type

Easy restart by micro swith

Two directional control valve


No need of grounding

Outdoor (Rainproof) use

Applications


- Septic tank (biological contact aeration)
- Air injection for bubble bath
- Small capacity compressor

Dimensions

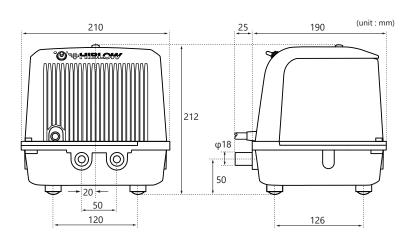

Specifications

	DUO-60		DUO-80	
Rated voltage [V]	AC120 / 230			
Power frequency [Hz]	50	60	50	60
Rated pressure [kPa]	14.7			
Airflow volume [L/min]	60		80	
Power consumption [W]	39		58	
Sound level [dBA]	35			
Weight [kg]	6			

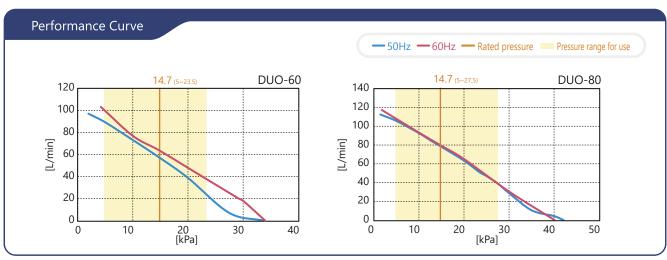

- * All characteristics values are only for reference, and are not guaranteed values.
- * Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).